

Main Signs TRE, TRD, TRM with alternating display


1 INTENDED USE

Main sign with alternating display as internally illuminated sign with white symbols on blue panels. Customer-specific imprints (car park name, arrows) are available as option.

2 DEVICE VIEW



3 DIMENSIONS (MM)

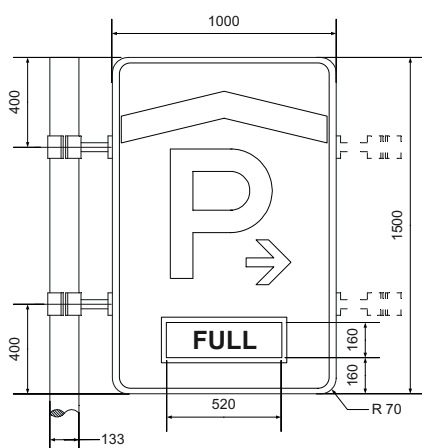

4 TECHNICAL SPECIFICATIONS

Housing:
- Weatherproof casing made of aluminium
- Sign panels made of particularly shock-proof acrylic glass
- Dust and water protected
Illumination:
- Illumination by fluorescent tubes, complete with fittings, inductive load and starter; ready for connection
Versions:
- TRE: single sided
- TRD: double sided
- TRM: with mounting mast
Electrical Connections:
For 2 positions:
- Protective conductor PE
- Neutral conductor N
- L1 Illumination
- L2 OPEN
- L3 FULL
For 3 positions (option):
- Protective conductor PE
- Neutral conductor N
- L1 Illumination
- L2 OPEN
- L3 FULL
- L4 CLOSED

Power Supply:
- 230 V / 50 Hz
Alternating Text:
- 'FULL' – red background, white letters
- 'OPEN' – green background, white letters
Colours:
- Background: blue
- Light edges, arrow, P-symbol and (if applicable) writing: white
- Window: clear
Approvals and Conformity:
- CE

5 EXTRACT FROM OPTIONS

Available Extras:
- Customer-specific imprint
- 3 positions (full/opened/closed):
- 'FULL' – red background, white letters
- 'OPEN' – green background, white letters
- 'CLOSED' – red background, white letters
- Mounting mast (133 mm diameter, 4300 mm high) with base plate, internally and externally zinc-plated and with door to the connection chamber, end-cap, mast cover, incl. anchoring bolts and foundation template.